

CASAR HEXAPLAST


PROPERTIES




No swivel




Lubricated




Tolerance



Plast rope







Compacted



preformed

APPLICATIONS

High breaking load and good resistance against crushing. Hoisting rope in multiple part reeving for smaller lifting heights as well as for twin hoist systems with left and right hand lay ropes for greater lifting heights.

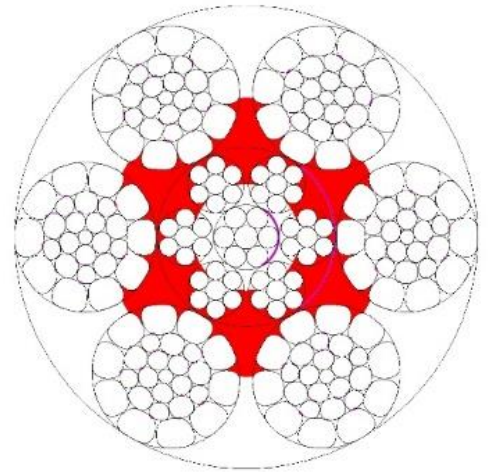

BREAKING FORCES

nominal diameter	weight	minimum breaking force	
		1960 N/mm ²	
mm	kg/m	kN	
16	1,178	224	
24	2,650	504	
25	2,875	528	
26	3,110	575	
28	3,607	666	
29	3,869	710	
30	4,141	765	
31,75	4,638	857	
32	4,711	870	
34	5,318	983	
35	5,636	1070	
36	5,963	1100	

PRELIMINARY

- Temperature range of use: -50°C to $+115^{\circ}\text{C}$
- Available in ordinary lay
- Available in right hand and left hand
- Available in galvanized

Product specifications are subject to change without notice or obligation. The shown photographs, drawings or cross sections are only for illustrative purposes, the images can vary depending on requested diameter and current status of technical development.

CASAR Drahtseilwerk Saar GmbH
 Casarstrasse 1 | D-66459 Kirkel-Limbach
 Postfach 1187 | 66454 Kirkel | GERMANY | Phone: +49 6841 8091-0
 E-Mail: info.casar@wirecogroup.com | Internet: www.casar.de

